


# Bi-Tech 4

|                       |         |
|-----------------------|---------|
| <b>Product number</b> | D1C1080 |
| <b>Weight</b>         | 0.2kg   |
| <b>Length</b>         | 375mm   |
| <b>Width</b>          | 375mm   |
| <b>Height</b>         | 200mm   |

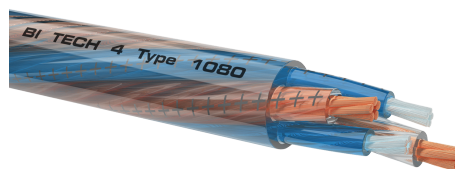

## Product description

Outstanding bi-wiring speaker cable of the extra class. 2 x 2.5 mm<sup>2</sup> silver-plated oxygen-free copper for the mids / highs and 2 x 4 mm<sup>2</sup> oxygen-free copper for the loss-free transmission of the bass. It reproduces an impressively natural and detailed sound image. The use of very high quality materials for both the conductors and the insulation ensure high flexibility and guarantee excellent, powerful bass with fine-detailing treble at the same time.

## Product properties

|                                 |                                                                      |
|---------------------------------|----------------------------------------------------------------------|
| <b>Inner conductor material</b> | OFC - oxygen-free copper, SPC/OFC - silver-plated oxygen-free copper |
| <b>cable material</b>           | plastic                                                              |
| <b>Connection type</b>          | Audio                                                                |
| <b>Quality level</b>            | Excellence                                                           |
| <b>cable length</b>             | 50 m                                                                 |
| <b>Artikel FH Exklusiv</b>      | Ja                                                                   |
| <b>Product Category</b>         | Loudspeaker cable                                                    |
| <b>cable cross section</b>      | 2 x 2.5 mm <sup>2</sup> + 2 x 4.0 mm <sup>2</sup>                    |
| <b>Signal direction</b>         | IN/OUT                                                               |
| <b>Features</b>                 | 30 years warranty**, Certified production in Europe                  |
| <b>cable geometry</b>           | Round                                                                |
| <b>Amplifier power</b>          | For amplifier performances of up to 400 watts                        |

More images

