


# USB Plus Micro | 3 m

|                       |         |
|-----------------------|---------|
| <b>Product number</b> | D1C9333 |
| <b>Weight</b>         | 0.16kg  |
| <b>Length</b>         | 40mm    |
| <b>Width</b>          | 250mm   |
| <b>Height</b>         | 145mm   |

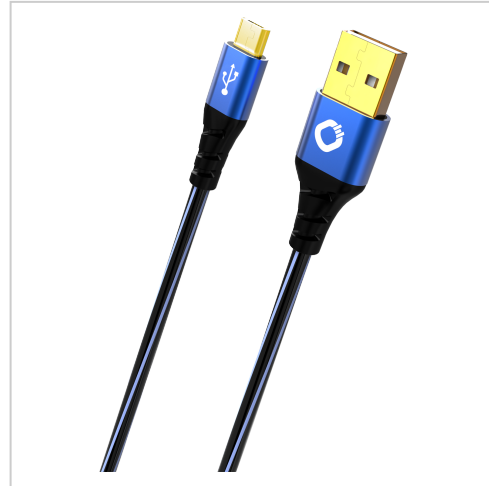

## Product description

A secure connection is guaranteed with the Oehlbach USB Plus cable thanks to gold-plated contacts, tough metal connectors and high-quality PVC shielding. The highly flexible OFC cable is available in various lengths and with different connector types.

## Product properties

|                                 |   |
|---------------------------------|---|
| <b>Inner conductor material</b> | OFC - oxygen-free copper  |
| <b>Features</b>                 | 24kt gold plated contacts, Reliable contact, loss-free signal transmission, 30 years warranty** |
| <b>Colour</b>                   | Blue  |
| <b>Product Category</b>         | Data cable  |
| <b>Lizenzen</b>                 | Hi-Speed USB  |
| <b>Quality level</b>            | Performance   |
| <b>Surface condition</b>        | 24 carat gold-plated contacts   |
| <b>Connection type</b>          | Data  |
| <b>Plug type 2</b>              | USB 2.0 Typ Micro B   |
| <b>cable length</b>             | 3 m   |
| <b>Shielding construction</b>   | 1 x aluminium foil + 1 x copper braiding  |
| <b>Connector material</b>       | solid metal plug  |
| <b>Signal direction</b>         | IN/OUT  |
| <b>Plug type 1</b>              | USB 2.0 Type A  |
| <b>cable geometry</b>           | Round   |
| <b>Shielding</b>                | Multiple shielding  |
| <b>Transmission rate</b>        | 480 Mbps  |

## More images

