


## Bi-Tech 4.4 L | 5 m

OEHLBACH Bi-Tech 4.4 L - Bi-Amping speaker cable with silver-plated OFC copper, assembled with spade connectors. Precise signal separation for audiophile Hi-Fi.

<b>Product number</b>	D1C10835
<b>Weight</b>	2.527kg
<b>Length</b>	320mm
<b>Width</b>	255mm
<b>Height</b>	120mm

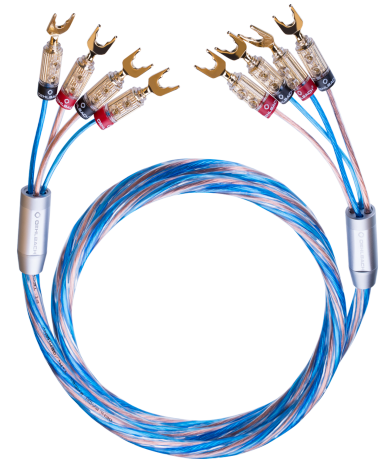

### Product description

Highly coordinated and outstandingly well-made bi-amping loudspeaker cable – preassembled with high-quality Oehlbach Fusion cable-shoe connectors. 2 x 2.5 mm<sup>2</sup> silver-plated oxygen-free copper (SPC) for mid-tones and trebles and 2 x 4 mm<sup>2</sup> oxygen-free copper (OFC) for the loss-free transmission of basses. It reproduces an impressively natural and detailed sound. The use of very high-quality materials both for the conductors as well as for the insulation guarantee great flexibility along with outstanding powerful bass and simultaneously high-resolution treble values.

### Product properties

<b>Features</b>	24kt gold plated contacts, Reliable contact, Made in Germany, 30 years warranty**, Bi-amping loudspeaker cable
<b>cable material</b>	plastic
<b>Inner conductor material</b>	SPC/OFC - silver-plated oxygen-free copper
<b>Surface condition</b>	24 carat gold-plated contacts
<b>Connection type</b>	Audio
<b>Quality level</b>	Excellence
<b>cable length</b>	5 m
<b>Plug type 2</b>	4 x cable lug
<b>Product Category</b>	Loudspeaker cable
<b>cable cross section</b>	2 x 2.5 mm <sup>2</sup> + 2 x 4.0 mm <sup>2</sup>
<b>Signal direction</b>	IN/OUT
<b>Colour</b>	Blue/Copper
<b>cable geometry</b>	Round
<b>Amplifier power</b>	For amplifier performances of up to 400 watts
<b>Plug type 1</b>	4 x cable lug

More images

